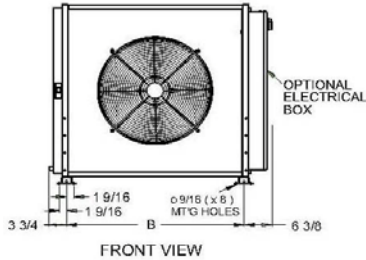


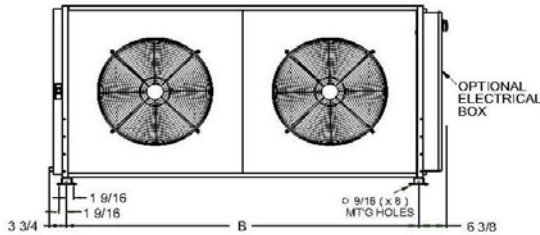
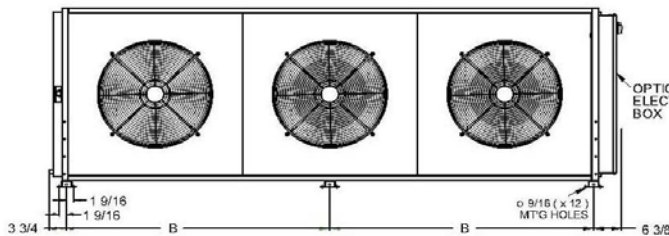


1 FAN

**Horizontal
Discharge Units**
**Electrical
Connection 7/8"**

2 FAN

3 FAN


Model	Fans	Mounting Dims (inch)	
		A	B
KS11-031	1	23 5/8	25 1/2
KS11-039	1	23 5/8	25 1/2
KS11-065	1	31 1/8	38
KS11-078	1	31 1/8	38
KS11-097	1	41 1/8	38
KS12-128	2	41 1/8	55 1/2
KS12-154	2	41 1/8	55 1/2
KS12-176	2	41 1/8	75 1/2
KS12-193	2	41 1/8	75 1/2
KS13-230	3	41 1/8	41 1/2
KS13-288	3	41 1/8	56 1/2

Small Line - Air Cooled Condenser c/w Fan Speed Control

Model	Ref. Circ.	R-407C THR Capacity (Btu/hr)				1075 RPM Fan Data				Sound Level Data @ 10 ft dBA	Conn. Sizes (inch)		Refrig. Charge (lb)	Approx Weight (lb)	
		TD = Condensing T - Ambient T				Dia. (inch)	Qty	Hp	Air Flow (CFM)		Hot Gas Line	Liquid Line		Unit	Ship
		15°F TD	20°F TD	25°F TD	30°F TD										
KS11-031-1	1	18,200	24,300	30,500	36,500	16	1	1/6	2,180	57	5/8	3/8	0.6	147	170
KS11-039-1	1	22,700	30,200	37,750	45,300	16	1	1/6	1,950	57	5/8	1/2	1.1	151	174
KS11-065-1	1	38,250	51,000	63,750	76,500	22	1	1/3	4,570	61	7/8	5/8	1.4	170	196
KS11-078-1	1	45,750	61,000	76,250	91,500	22	1	1/3	4,080	61	7/8	5/8	2.1	177	204
KS11-097-1	1	57,000	76,000	95,000	114,000	22	1	1/3	4,570	61	1 1/8	7/8	3.1	217	250
KS11-097-2	2	57,000	76,000	95,000	114,000	22	1	1/3	4,570	61	1 1/8	7/8	3.1	217	250
KS12-128-1	1	75,000	100,000	125,000	150,000	22	2	1/3	9,140	64	1 1/8	7/8	3.2	274	316
KS12-128-2	2	75,000	100,000	125,000	150,000	22	2	1/3	9,140	64	1 1/8	7/8	3.2	274	316
KS12-154-1	1	90,750	121,000	151,250	181,500	22	2	1/3	8,160	64	1 1/8	7/8	4.4	289	333
KS12-154-2	2	90,750	121,000	151,250	181,500	22	2	1/3	8,160	64	1 1/8	7/8	4.4	289	333
KS12-176-1	1	103,350	137,800	172,250	206,700	22	2	1/3	9,410	64	1 3/8	7/8	5.9	325	374
KS12-176-2	2	103,350	137,800	172,250	206,700	22	2	1/3	9,410	64	1 3/8	7/8	5.9	325	374
KS12-193-1	1	113,550	151,400	189,250	227,100	22	2	1/3	9,140	64	1 3/8	7/8	5.9	345	397
KS12-193-2	2	113,550	151,400	189,250	227,100	22	2	1/3	9,140	64	1 3/8	7/8	5.9	345	397
KS13-230-1	1	135,000	180,000	225,000	270,000	22	3	1/3	12,240	65	1 5/8	1 1/8	6.8	411	473
KS13-230-2	2	135,000	180,000	225,000	270,000	22	3	1/3	12,240	65	1 5/8	1 1/8	6.8	411	473
KS13-288-1	1	169,500	226,000	282,500	339,000	22	3	1/3	13,700	65	1 5/8	1 1/8	9.0	477	549
KS13-288-2	2	169,500	226,000	282,500	339,000	22	3	1/3	13,700	65	1 5/8	1 1/8	9.0	477	549

Notes :

1. Above capacity data based on 0°F subcooling @ sea level
3. For 50 Hz Sound Level Data multiply by 0.95

2. For 50 Hz Capacity multiply by 0.92

In the interest of continuous improvement, ClimateWorx reserves the right to change specifications without notice - May 2009. While every endeavor is made to ensure accuracy, ClimateWorx International Inc. accepts no responsibility or liability resulting from the use of this information.