

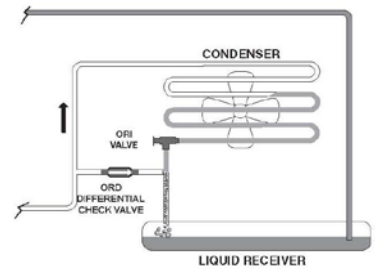


Factory Mounted & Piped Receiver Kits fit within standard unit leg configuration




ORI / ORD CONDENSER PRESSURE CONTROL

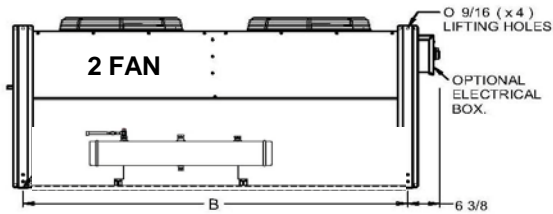

Vertical Discharge Units

Electrical Connection 7/8"

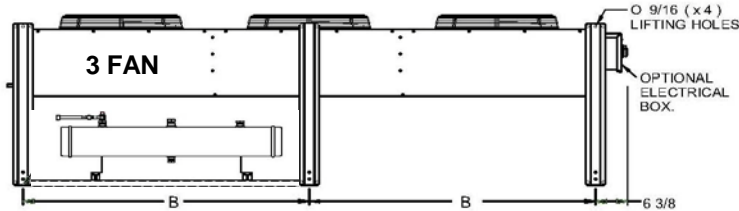

Model	Fans	Mounting Dims (inch)	
		A	B
KS11-031	1	24 1/8	25 1/2
KS11-039	1	24 1/8	25 1/2
KS11-065	1	31 5/8	38
KS11-078	1	31 5/8	38
KS11-097	1	41 5/8	38
KS12-128	2	41 5/8	55 1/2
KS12-154	2	41 5/8	55 1/2
KS12-176	2	41 5/8	75 1/2
KS12-193	2	41 5/8	75 1/2
KS13-230	3	41 5/8	41 1/2
KS13-288	3	41 5/8	56 1/2

Small Line - Air Cooled Condenser c/w Receiver Kit for Head Pressure Control

Model	Ref. Circ.	R-R407C THR Capacity (Btu/hr)				1075 RPM Fan Data				Sound Level Data @ 10 ft dBA	Conn. Sizes (inch)		Refrigerant Charge (lb)		Approx Weight (lb)	
		TD = Condensing T - Ambient T				Dia. (inch)	Qty	Hp	Air Flow (CFM)		Hot Gas Line	Liquid Line	Normal	Winter Flooded (-40°F) Amb.	Unit	Ship
		15F° TD	20F° TD	25F° TD	30F° TD											
KS11-031-1	1	18,300	24,400	30,500	36,600	16	1	1/6	2,180	55	5/8	3/8	0.6	1.9	186	214
KS11-039-1	1	22,650	30,200	37,750	45,300	16	1	1/6	1,950	55	5/8	1/2	1.1	3.3	190	219
KS11-065-1	1	38,250	51,000	63,750	76,500	22	1	1/3	4,570	60	7/8	5/8	1.4	4.7	209	241
KS11-078-1	1	45,750	61,000	76,250	91,500	22	1	1/3	4,080	60	7/8	5/8	2.1	6.8	216	257
KS11-097-1	1	57,000	76,000	95,000	114,000	22	1	1/3	4,570	60	1 1/8	7/8	3.1	10.0	256	295
KS11-097-2	2	57,000	76,000	95,000	114,000	22	1	1/3	4,570	60	1 1/8	7/8	3.1	10.0	256	295
KS12-128-1	1	75,000	100,000	125,000	150,000	22	2	1/3	9,140	62	1 1/8	7/8	3.2	12.2	313	374
KS12-128-2	2	75,000	100,000	125,000	150,000	22	2	1/3	9,140	62	1 1/8	7/8	3.2	12.2	313	374
KS12-154-1	1	90,750	121,000	151,250	181,500	22	2	1/3	8,160	62	1 1/8	7/8	4.4	17.2	328	389
KS12-154-2	2	90,750	121,000	151,250	181,500	22	2	1/3	8,160	62	1 1/8	7/8	4.4	17.2	328	389
KS12-176-1	1	103,350	137,800	172,250	206,700	22	2	1/3	9,410	62	1 3/8	7/8	5.9	23.3	364	425
KS12-176-2	2	103,350	137,800	172,250	206,700	22	2	1/3	9,410	62	1 3/8	7/8	5.9	23.3	455	524
KS12-193-1	1	113,550	151,400	189,250	227,100	22	2	1/3	9,140	62	1 3/8	7/8	5.9	23.3	384	465
KS12-193-2	2	113,550	151,400	189,250	227,100	22	2	1/3	9,140	62	1 3/8	7/8	5.9	23.3	475	547
KS13-230-1	1	135,000	180,000	225,000	270,000	22	3	1/3	12,240	63	1 5/8	1 1/8	6.8	26.6	476	521
KS13-230-2	2	135,000	180,000	225,000	270,000	22	3	1/3	12,240	63	1 5/8	1 1/8	6.8	26.6	541	623
KS13-288-1	1	169,500	226,000	282,500	339,000	22	3	1/3	13,700	63	1 5/8	1 1/8	9.0	35.0	542	587
KS13-288-2	2	169,500	226,000	282,500	339,000	22	3	1/3	13,700	63	1 5/8	1 1/8	9.0	35.0	607	699

- Notes :
1. Above capacity data based on 0°F subcooling @ sea level
 2. For 50 Hz Capacity multiply by 0.92
 3. For 50 Hz Sound Level Data multiply by 0.95

In the interest of continuous improvement, ClimateWorx reserves the right to change specifications without notice - Feb. 2010. While every endeavor is made to ensure accuracy, ClimateWorx International Inc. accepts no responsibility or liability resulting from the use of this information.