


PAC 1


PAC N

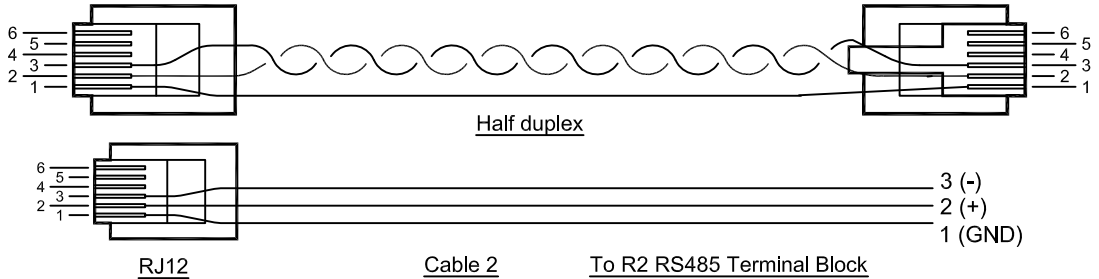


Half duplex

Cable 2

To R2 RS485 Terminal Block



Socket
PC Board

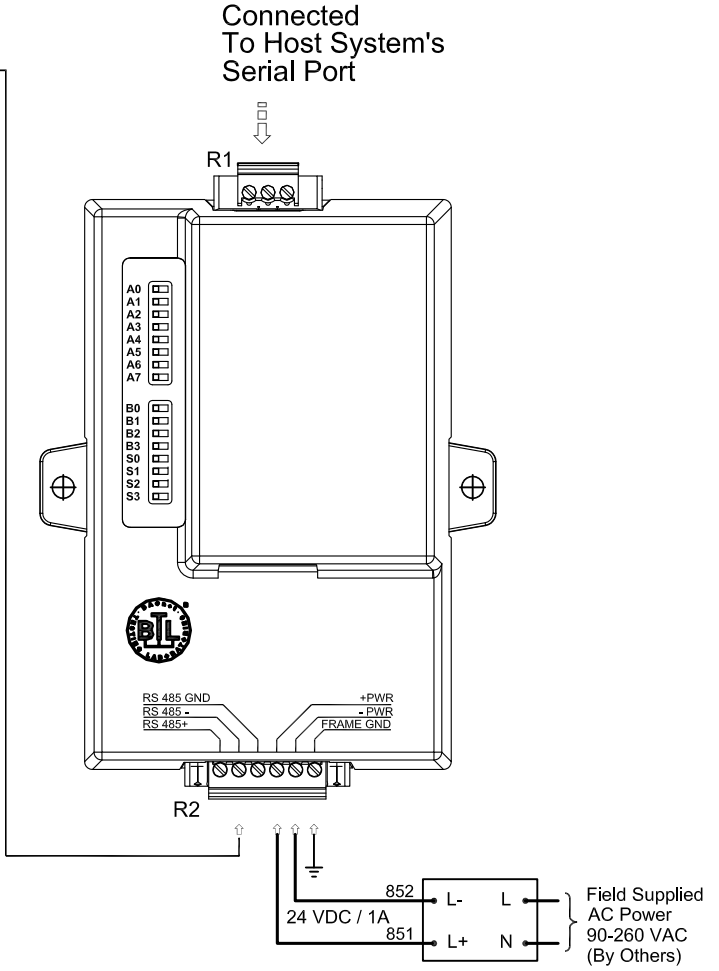

Connected To Host System's
Serial Port

DC POWER
SUPPLY

Field Supplied
AC Power
90-260 VAC
(By Others)

J21 and J22 (RS485)	
PIN No.	Half duplex
1	Grd
2	T/R(+)
3	T/R(-)

- Note :
1. J21 and J22 are RJ12 socket.
 2. Twisted pair CAT.5E, 24AWG.
 3. All inter connection cables by others.