



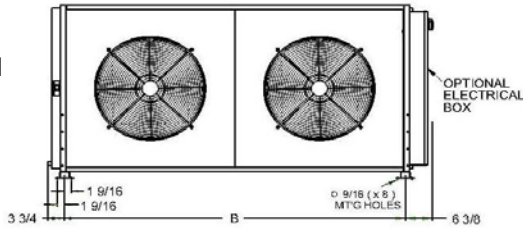
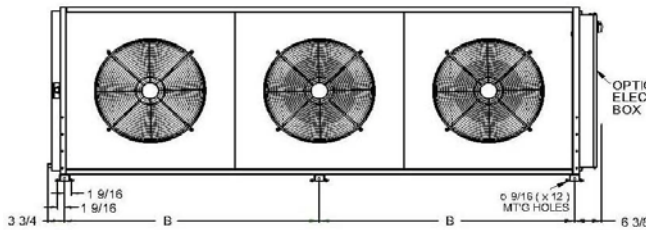


**1 FAN**

**Horizontal  
Discharge Units**
**Electrical  
Connection 7/8"**

**2 FAN**


Factory  
Mounted, Field  
Piped and Wired  
Skidded  
Receiver Kits.  
One Receiver  
Shown. Two  
Provided on  
Two Circuit  
Units

**3 FAN**


Model	Fans	Mounting Dims (inch)	
		A	B
KS11-031	1	23 5/8	25 1/2
KS11-039	1	23 5/8	25 1/2
KS11-065	1	31 1/8	38
KS11-078	1	31 1/8	38
KS11-097	1	41 1/8	38
KS12-128	2	41 1/8	55 1/2
KS12-154	2	41 1/8	55 1/2
KS12-176	2	41 1/8	75 1/2
KS12-193	2	41 1/8	75 1/2
KS13-230	3	41 1/8	41 1/2
KS13-288	3	41 1/8	56 1/2

### Small Line - Air Cooled Condenser c/w Receiver Kit for Head Pressure Control

Model	Ref. Circ.	R-407C THR Capacity (Btu/hr)				1075 RPM Fan Data				Sound Level Data @ 10 ft dBA	Conn. Sizes (inch)		Refrig. Charge (lb)	Approx Weight (lb)	
		TD = Condensing T - Ambient T				Dia. (inch)	Qty	Hp	Air Flow (CFM)		Hot Gas Line	Liquid Line		Unit	Ship
		15F° TD	20F° TD	25F° TD	30F° TD										
KS11-031-1	1	18,200	24,300	<b>30,500</b>	36,500	16	1	1/6	2,180	57	5/8	3/8	0.6	147	170
KS11-039-1	1	22,700	30,200	<b>37,750</b>	45,300	16	1	1/6	1,950	57	5/8	1/2	3.3	151	174
KS11-065-1	1	38,250	51,000	<b>63,750</b>	76,500	22	1	1/3	4,570	61	7/8	5/8	4.7	170	196
KS11-078-1	1	45,750	61,000	<b>76,250</b>	91,500	22	1	1/3	4,080	61	7/8	5/8	6.8	177	204
KS11-097-1	1	57,000	76,000	<b>95,000</b>	114,000	22	1	1/3	4,570	61	1 1/8	7/8	10.0	217	250
KS11-097-2	2	57,000	76,000	<b>95,000</b>	114,000	22	1	1/3	4,570	61	1 1/8	7/8	10.0	217	250
KS12-128-1	1	75,000	100,000	<b>125,000</b>	150,000	22	2	1/3	9,140	64	1 1/8	7/8	12.2	274	316
KS12-128-2	2	75,000	100,000	<b>125,000</b>	150,000	22	2	1/3	9,140	64	1 1/8	7/8	12.2	274	316
KS12-154-1	1	90,750	121,000	<b>151,250</b>	181,500	22	2	1/3	8,160	64	1 1/8	7/8	17.2	289	333
KS12-154-2	2	90,750	121,000	<b>151,250</b>	181,500	22	2	1/3	8,160	64	1 1/8	7/8	17.2	289	333
KS12-176-1	1	103,350	137,800	<b>172,250</b>	206,700	22	2	1/3	9,410	64	1 3/8	7/8	23.3	325	374
KS12-176-2	2	103,350	137,800	<b>172,250</b>	206,700	22	2	1/3	9,410	64	1 3/8	7/8	23.3	325	374
KS12-193-1	1	113,550	151,400	<b>189,250</b>	227,100	22	2	1/3	9,140	64	1 3/8	7/8	23.3	345	397
KS12-193-2	2	113,550	151,400	<b>189,250</b>	227,100	22	2	1/3	9,140	64	1 3/8	7/8	23.3	345	397
KS13-230-1	1	135,000	180,000	<b>225,000</b>	270,000	22	3	1/3	12,240	65	1 5/8	1 1/8	26.6	411	473
KS13-230-2	2	135,000	180,000	<b>225,000</b>	270,000	22	3	1/3	12,240	65	1 5/8	1 1/8	26.6	411	473
KS13-288-1	1	169,500	226,000	<b>282,500</b>	339,000	22	3	1/3	13,700	65	1 5/8	1 1/8	35.0	477	549
KS13-288-2	2	169,500	226,000	<b>282,500</b>	339,000	22	3	1/3	13,700	65	1 5/8	1 1/8	35.0	477	549

- Notes :
- Above capacity data based on 0°F subcooling @ sea level
  - For 50 Hz Capacity multiply by 0.92
  - For 50 Hz Sound Level Data multiply by 0.95

In the interest of continuous improvement, ClimateWorx reserves the right to change specifications without notice - Feb. 2010. While every endeavor is made to ensure accuracy, ClimateWorx International Inc. accepts no responsibility or liability resulting from the use of this information.